



1/6

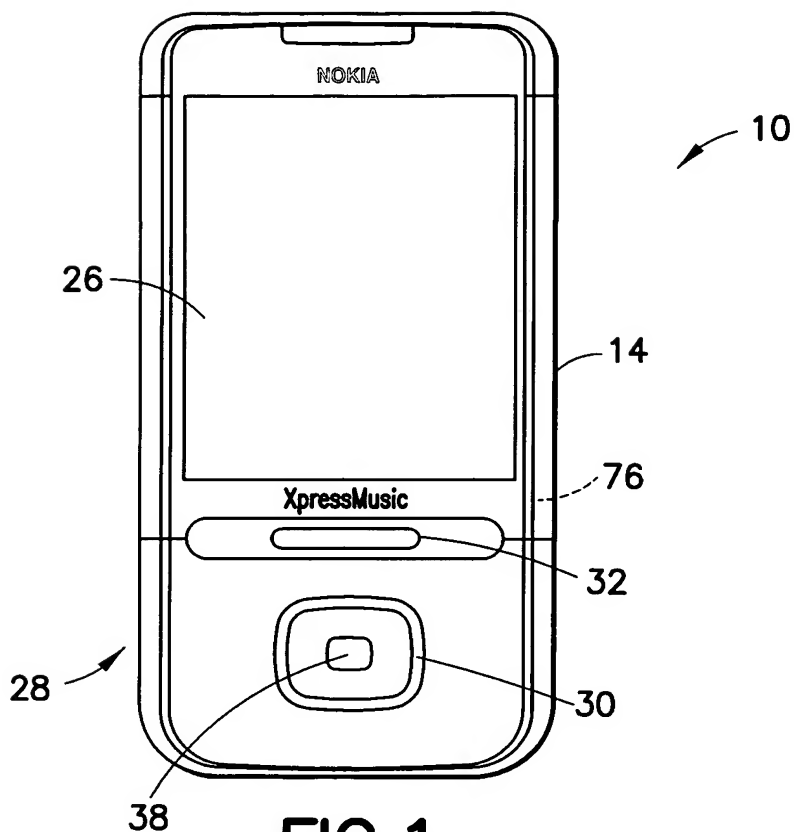


FIG. 1

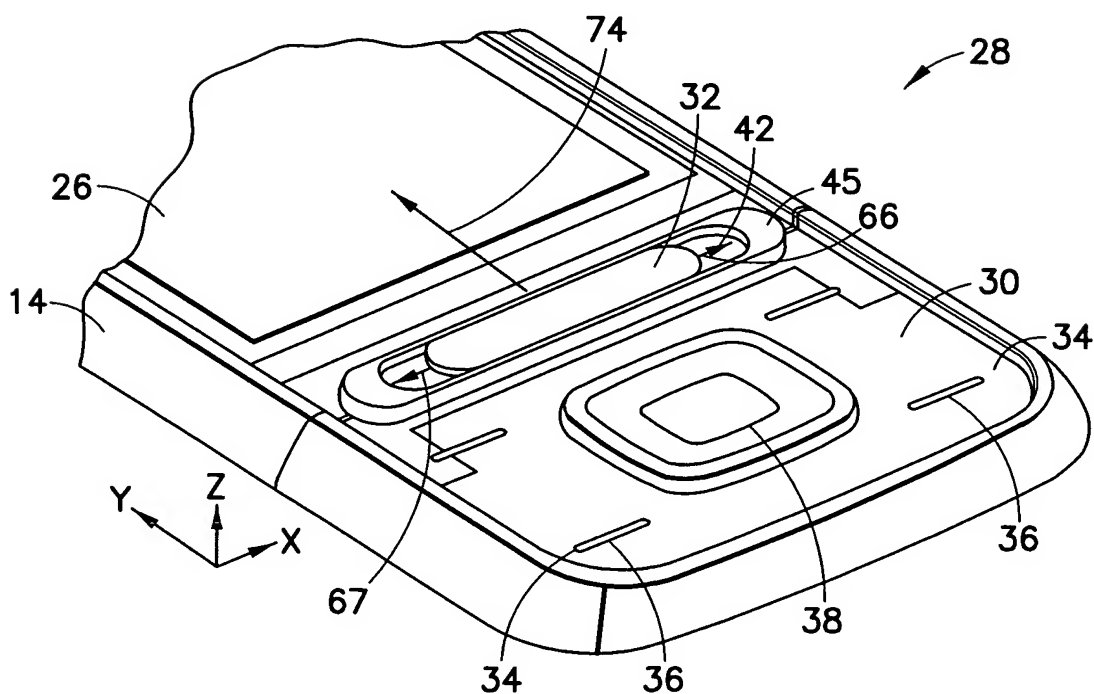


FIG. 4

2/6

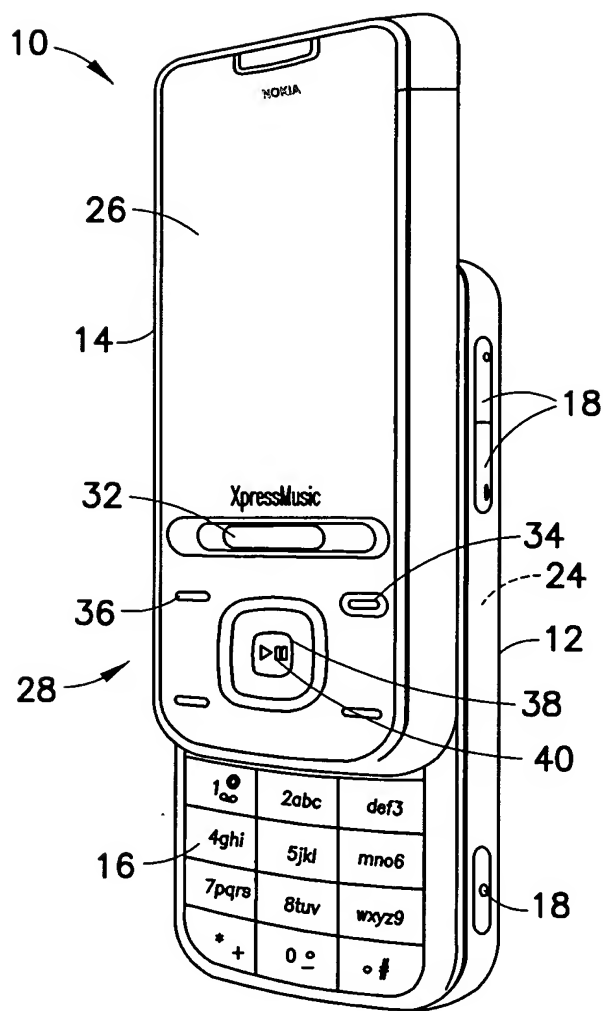


FIG. 2

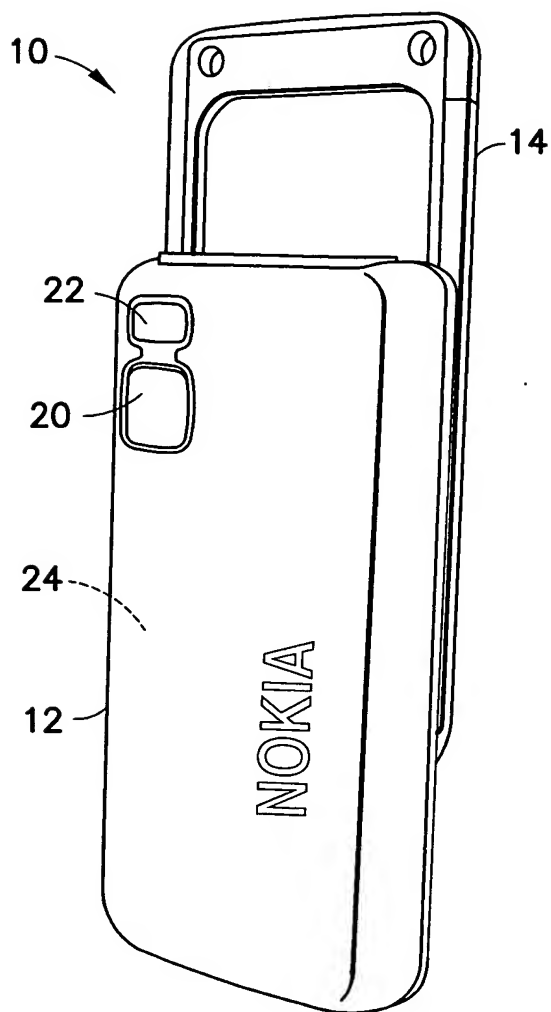


FIG. 3

FIG. 1 is a cross-sectional view of a device assembly. A substrate 14 is shown with a central opening. A component 32 is mounted on the substrate, featuring a top surface 74 and a side surface 58. A component 45 is positioned to the right of component 32. A component 44 is located beneath component 32, and a component 48 is located beneath component 45. Arrows 76 and 74 indicate flow directions.

4/6

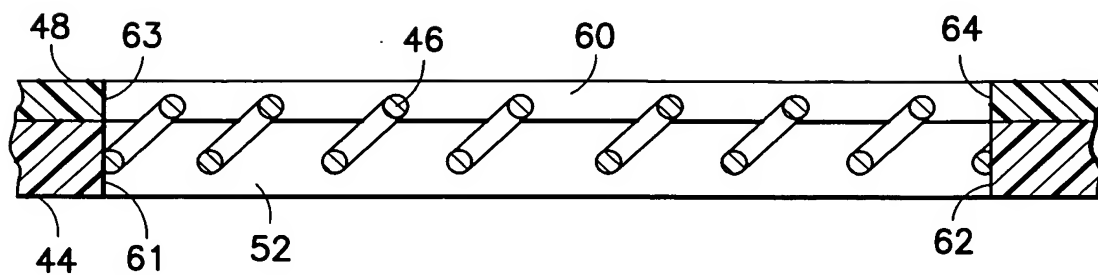


FIG. 7

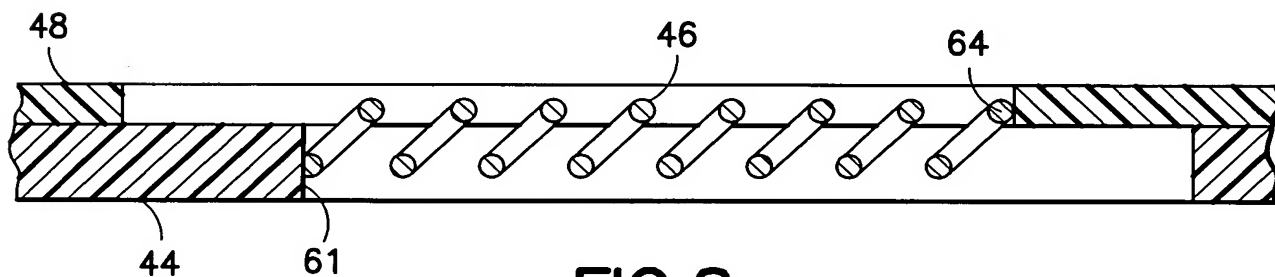


FIG. 8

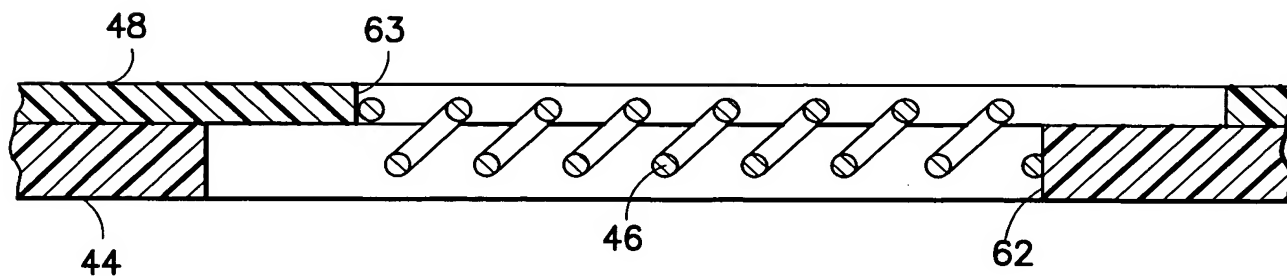


FIG. 9

5/6

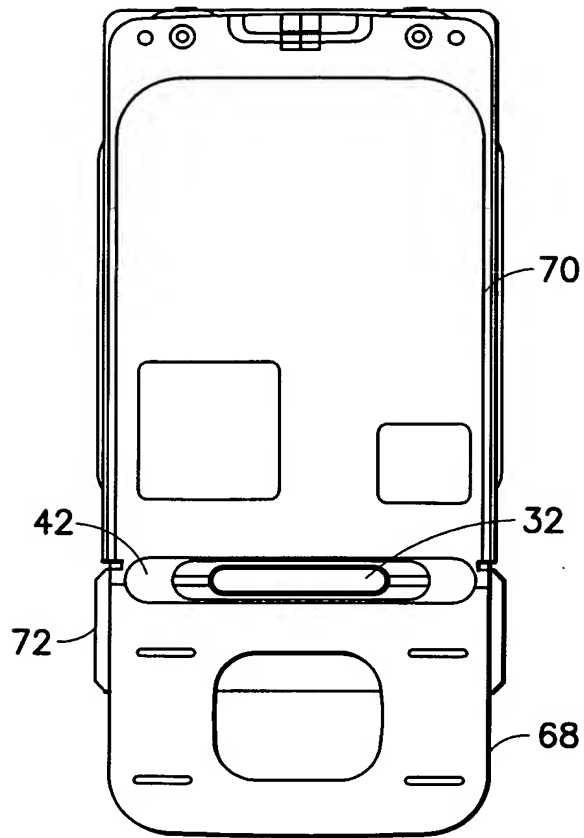


FIG. 10

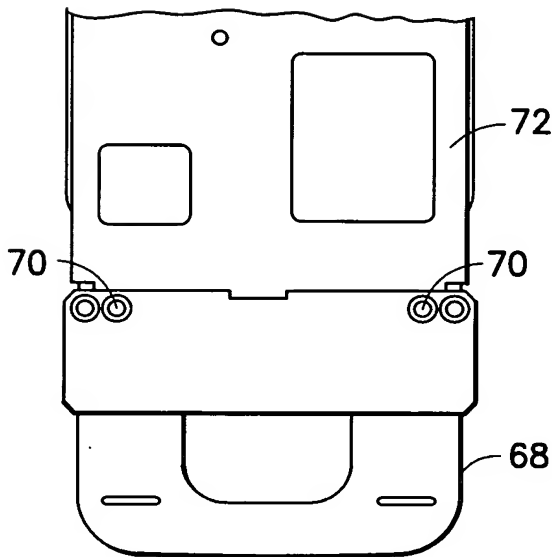


FIG. 11

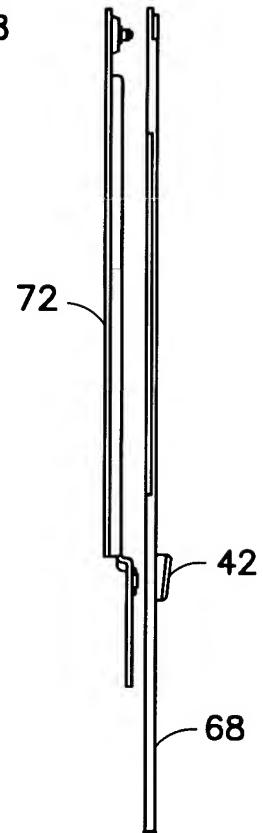


FIG. 12

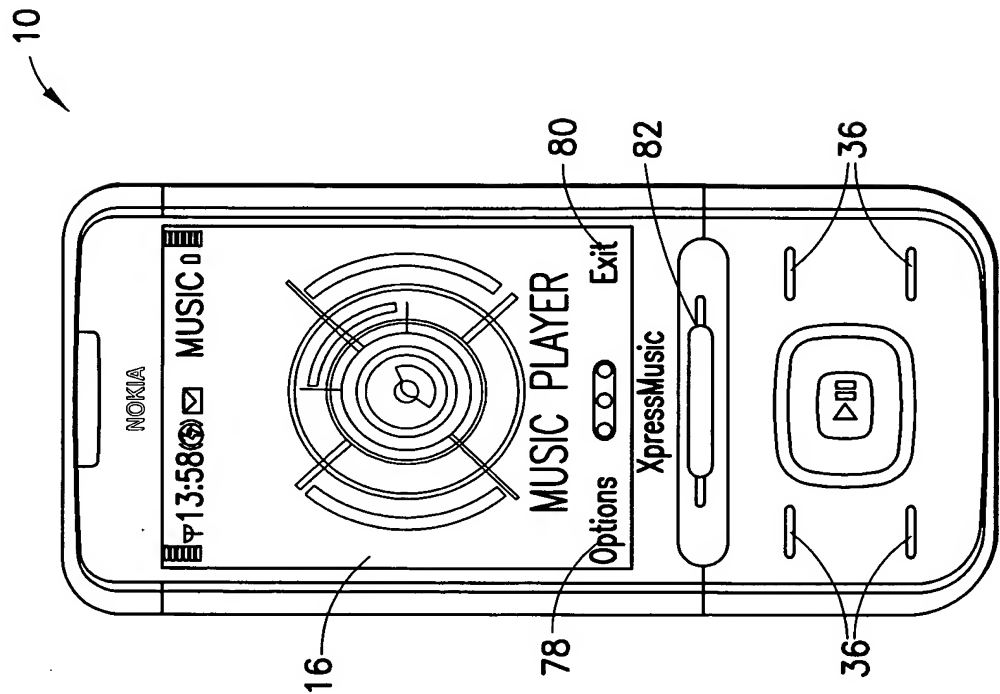


FIG. 14

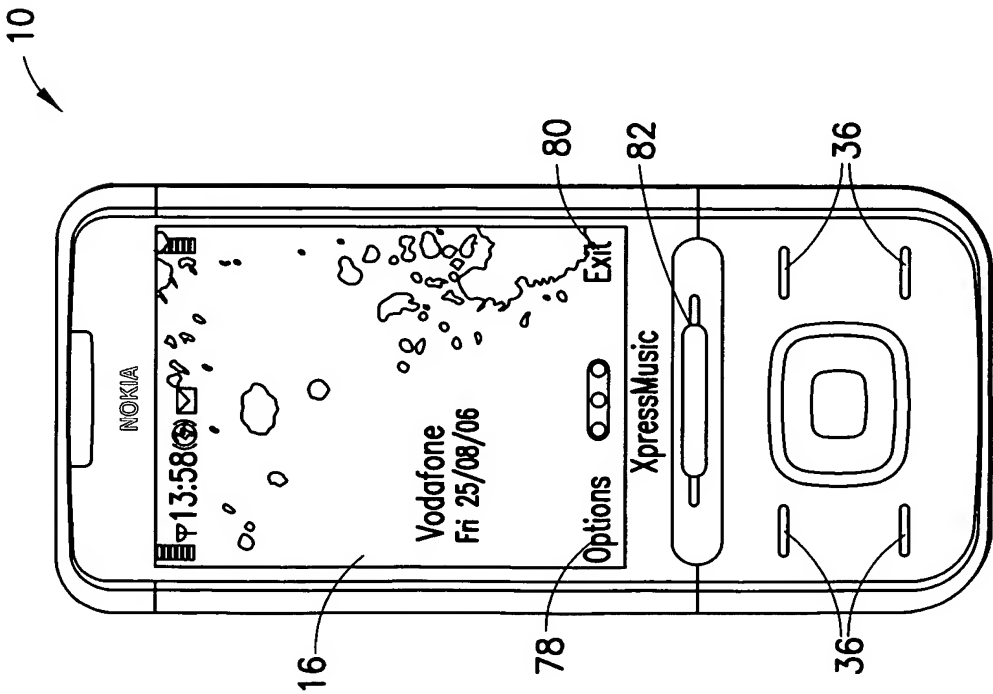


FIG. 13